



Installation instructions Audi 3.3ltr.225bhp V8 / 4.0ltr.275bhp V8

Close up Rail pressure sensor

III.1

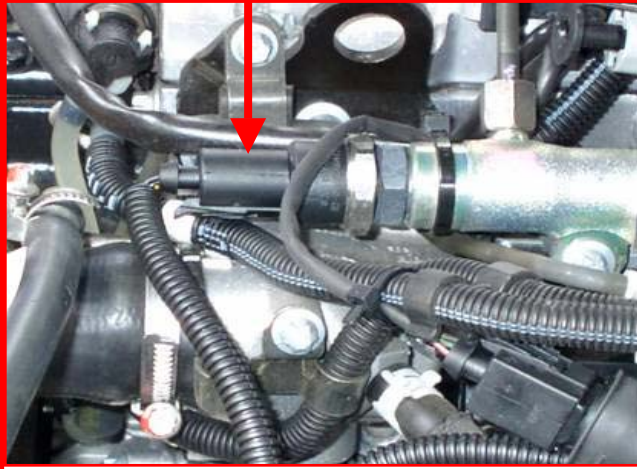

Pressure Transducer Sensor T-cable cable connection engine

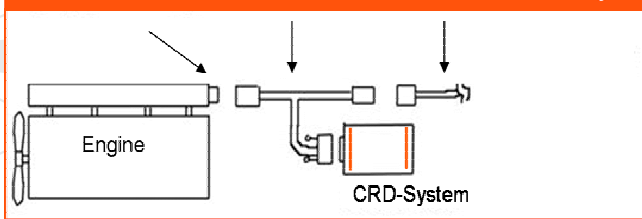

Installation Audi 3.3Ltr.225bhp V8 / 4.0Ltr.275bhp V8

Use with: Wiring loom CDI1

- Switch the Ignition off.
- Localise the diesel pressure sensor/pressure transducer sensor on the common rail. See picture.
- Pull out the three-pole plug.
- Connect the cable of the CRD System to the original plug of the common rail.
- If possible, lay the cable protected from splash water.
- Now plug the module onto the Sub-D Connection.
- The system is preset; normally you will not need to readjust the module.
- If you want to increase or reduce the power performance, you will only need
 - to turn the potentiometer to the left (increased efficiency) or to the right (reduced power performance). Only CR modules.
- For additional Supererogation settings on the CRD-Module the jumper position in the module has to be changed. Further explanations are available in the:
- Now fit the engine cover back on. The vehicle is now ready for a test drive.
- If you remove the module, you have to plug the peg onto the cable harness or remove the whole tuning system and restore the original settings, otherwise the vehicle will not function properly.

